

## Adjust Angle Thermometer, Mercury Free, Standard Model A935AF5

### STANDARD FEATURES

- Mercury Free.
- Molded Valox® – V-shaped black case for ranges up to and including 300°F
- Die cast black aluminum V-shaped case for ranges above 300°F.
- Glass front excludes dust and dirt.
- White aluminum scale with bold black graduations and figures.
- Mercury Free blue liquid in glass with magnifying lens for easy readability.
- Accuracy is  $\pm 1\%$  of full scale.
- Easy adjustment permits case and stem to be rotated 360°.
- 3½", 6", 9" & 12" stems available.
- 1¼"-18" NEF swivel nut.

### OPTIONS

- Plastic window available for both 7" and 9" scale.
- Aluminum case available for low ranges (300°F and below).

### RANGES

#### FAHRENHEIT

–40/110F  
0/120F  
0/160F  
30/180F  
30/240F  
30/300F  
50/400F<sup>(1)</sup>  
50/550F<sup>(1)</sup>

#### MINOR GRADS

2°  
1°  
2°  
2°  
2°  
5°  
5°  
5°

#### RANGE CODE

F1  
F2  
F3  
F4  
F5  
F6  
F7  
F8

#### CELSIUS

–20/45C  
0/50C  
0/100C  
0/160C<sup>(1)</sup>  
0/200C<sup>(1)</sup>  
0/300C<sup>(1)</sup>

1°  
1°  
1°  
2°  
2°  
5°

C1  
C2  
C3  
C4  
C5  
C6


#### DUAL SCALE

–40/110F & –40/43C  
0/120F & –15/48C  
0/160F & –15/70C  
30/180F & 0/82C  
30/240F & 0/115C  
30/300F & 0/150C  
50/400F & 10/200C<sup>(1)</sup>  
50/550F & 10/290C<sup>(1)</sup>

2°  
1°  
2°  
2°  
2°  
5°  
5°  
5°

D1  
D2  
D3  
D4  
D5  
D6  
D7  
D8

(1) Must be supplied with optional aluminum case.

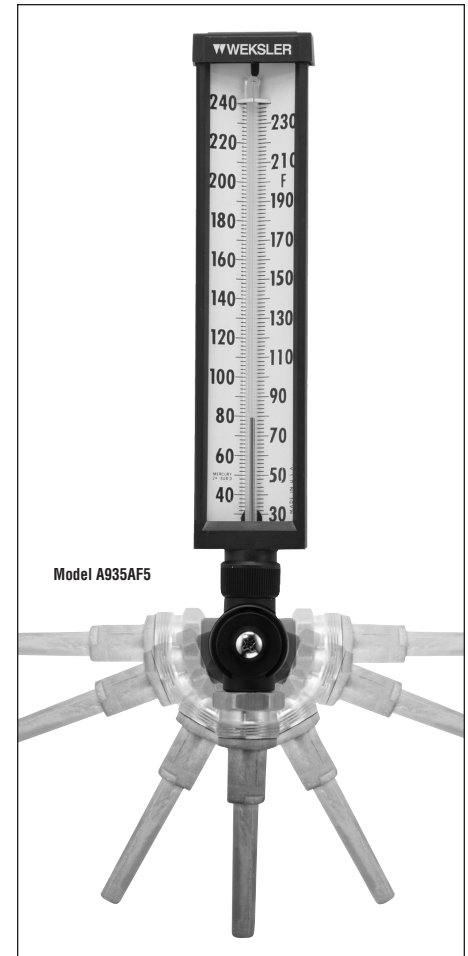

### HOW TO ORDER

1. Product Type: **A**  
A = Adjust Angle Thermometer
2. Scale Size: 7 = 7" Scale; 9 = 9" Scale **9**
3. Stem Length: 35 = 3½"; 60 = 6"; 90 = 9"; 12 = 12" **35**
4. Connection Location: A = Adjust Angle **A**
5. Range (see table) **F5**
6. Options: AL = Aluminum Case\*; PD = Plastic Window **— AL**

\*Aluminum case is required for ranges over 300°F